



(University of Choice)  
**MASINDE MULIRO UNIVERSITY OF  
SCIENCE AND TECHNOLOGY  
(MMUST)**

**MAIN CAMPUS**

**UNIVERSITY EXAMINATIONS  
2021/2022 ACADEMIC YEAR**

**FOURTH YEAR FIRST SEMESTER SPECIAL/SUPPLEMENTARY EXAMINATIONS  
FOR THE DEGREE  
OF  
BACHELOR OF SCIENCE IN MECHANICAL AND INDUSTRIAL ENGINEERING**

**COURSE CODE: MIE 453**

**COURSE TITLE: CONTROL ENGINEERING FINAL EXAMINATIONS**

**DATE: Wednesday, October, 5<sup>TH</sup>, 2022**

**TIME: 9.00- 11.00**

---

**INSTRUCTIONS TO CANDIDATES**

Question ONE (1) is compulsory  
Answer Any Other THREE (3) questions

TIME: 3 Hours

**MMUST observes ZERO tolerance to examination cheating**

This Paper Consists of 6 Printed Pages. Please Turn Over.

Q1. (a) (i) Define the following two terms in representation of control systems: Signal flow graph and a node. (2 mks)

(ii) In general, state the two concepts of stability. (2mks)

(iii) State Mason's gain formula (2 mks)

(iv) Name the two forms of representation of the open loop transfer function in time response analysis of control systems. (2 mks).

(b) Determine whether the time constant for the characteristic equation given below is greater than 1 sec. (3 mks).

$$D(s) = s^4 + 6s^3 + 14s^2 + 16s + 8$$

(c) Consider the network in Fig.1.1 Obtain the relation between the applied voltage and current in the form of:

(i) Differential equation (2 mks)

(ii) Transfer function. (3 mks)

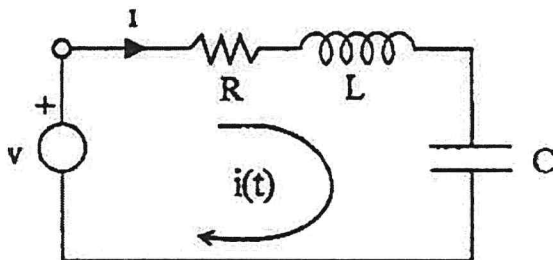


Fig.1.1

(d) (i) Consider a first order feedback system fig.1.2 subjected to a unit step input  $R(s) = \frac{1}{s}$  where  $G(s) = \frac{1}{\tau s}$ . Derive  $c(t)$  and plot  $c(t)$  vs time and explain its response. (4 mks)

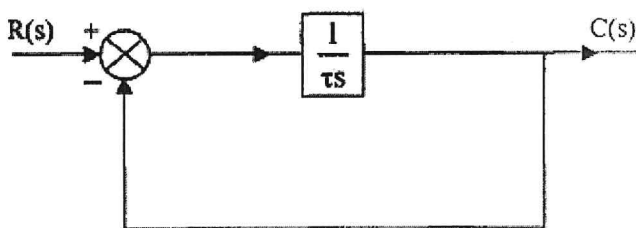


Fig.1.2

(ii) For the system under consideration in fig.1.2 derive the steady state error  $e(t)$  of the system and explain its implication on the system.(3 mks).

(e) For the open loop system in Fig. 1.3 (a) find the percentage change in the steady state value of  $C(s)$  for a unit step input and for a 10% change in  $K$ . (3 mks)

(f) For the closed loop system in Fig. 1.3 (b), find the percentage change in the steady state value of  $C(s)$  for a unit step input for the same increase in the value of  $K$ . (4 mks)




Fig. 1.3 (a) Open loop system

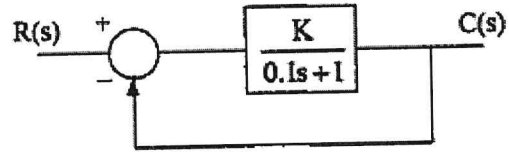


Fig. 1.3 (b) Closed loop system

Q2. (a) State the advantages and disadvantages of open and closed loop systems. (6 mks)

(b) Find the overall transfer function of the system shown in Fig.2.1 using the block diagram reduction technique. (7 mks)

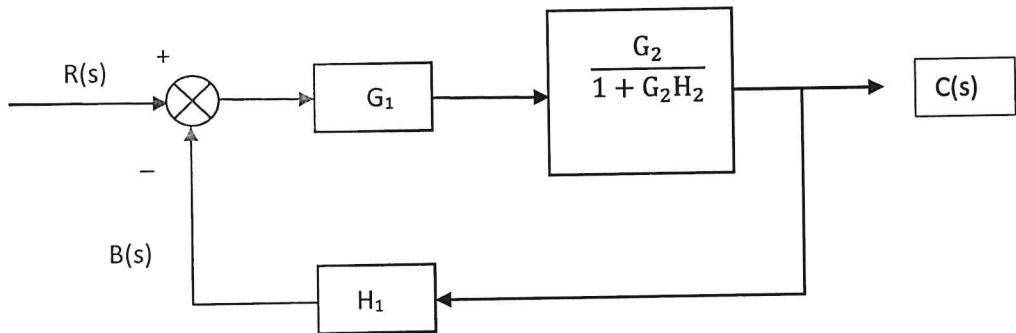


Fig.2.1

(c) Draw the signal flow graph and find the transfer function for the network in Fig. 2.2 using Mason's gain formula (7 mks)

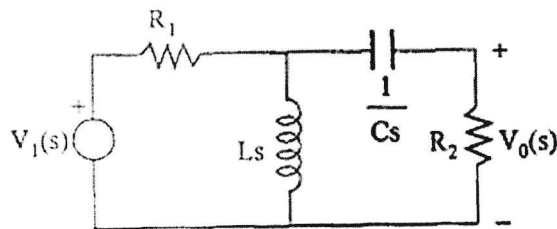


Fig.2.2

Q3. (a) In general, state the two concepts of stability and the systems where the two concepts are equal. (2 mks).

(b) Using Routh Hurwitz Criterion determine whether the characteristic equation indicated below is stable and indicate the number of roots in the right half of  $s$ -plane. (2 mks).

$$D(s) = s^4 + 2s^3 + s^2 + 4s + 2 = 0$$

(c) Comment on the Stability of the system with the following characteristic equation. (10 mks).

$$D(s) = s^6 + s^5 + 7s^4 + 6s^3 + 31s^2 + 25s + 25$$

(d) Consider a mechanical translational system in Fig 3.1. Derive its differential equation and transfer function. (6 mks).

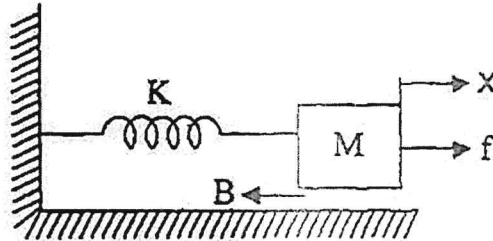


Fig.3.1

Q4. Sketch the root locus of the system with loop transfer function. (20 mks).

$$G(s)H(s) = \frac{K}{s(s+2)(s^2+s+1)}$$

Q5. Consider a system

$$G_c(s) = \frac{K_v}{s(s+1)}$$

The specifications are:

$e_{ss}$  for a velocity input should be less than 0.1.

Phase margin should be greater than  $40^\circ$ .

Determine:

- (i) The value of  $K_v$ . (1mk)
- (ii) Draw the Bode for the value of  $K_v$ . (10 mks)
- (iii) The gain cross over frequency. (2 mks).
- (iv) Phase margin of uncompensated system. (2 mks)
- (v) Phase lead, assuming  $\Phi_c$  is  $8^\circ$ . (2 mks)
- (vi)  $\alpha$  of the phase lead network. (3mks)